Lovibond® Scuba Evolution

Scuba II

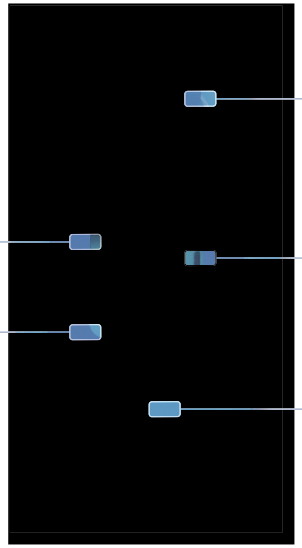

5 measuring methods

small display, less information

uniform backlit display

3 buttons without icons

no data transfer

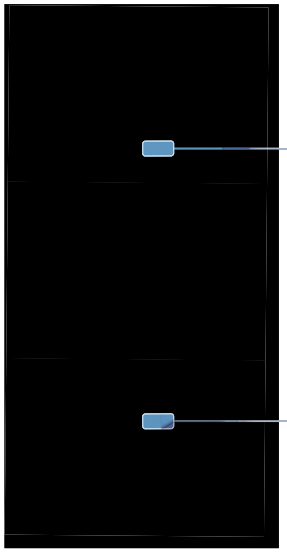

ergonomic design with rounded back

battery compartment with click push lock

Scuba3s

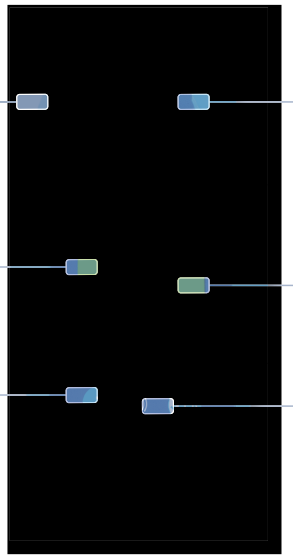

8 times faster readings

all important measuring methods for the pool

coloured backlit display

larger display with animations & icons

new keypad with 4 buttons & icons

NFC data transfer via smartphone/tablet to the Lovibond® PoolAssistant App

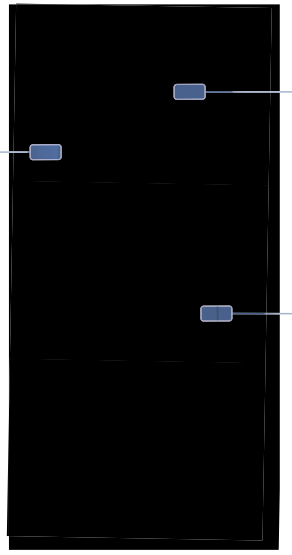

new ergonomic design with waterproof housing

flat footprint: test without wobbling

waterproof, screwed battery compartment

Scuba II

Scuba3s

Technical data	Scuba II	Scuba3s
Optics	Temperature compensated LED & photosensor amplifier	LED (white light), optical multichannel sensor with diffuser
Conformity	CE	CE, UKCA
Wavelength range	530 nm	Multi wavelength
Display	LCD segmented, backlight monochrome, 33 x 25 mm	LCD dot matrix with backlight (red, white, green), 35 x 25 mm
Data interface	–	NFC (Near Field Communication)
App connectivity	–	✓
Data logger	–	100 data sets
Power supply	2 AAA batteries (LR03), battery life: approx. 90 measurements	2 x AA batteries (Mignon AA/LR6), battery life: 5000 measurements
Auto-Off	5 minutes after last key press	5 minutes
Environmental conditions	5–40 °C	5–50 °C
Waterproof	✓	✓
Methods	Chlorine, Bromine, pH value, Alkalinity, Cyanuric acid	Chlorine (total, free, combined), Bromine, pH value, Alkalinity-m, Calcium hardness, Cyanuric acid, Oxygen active, Copper, Phosphate
Keypad	3 buttons for various functions	4 buttons for various functions